




ITEM NO: I215-333 Open Display case

Thank you for purchasing this quality product. Be sure to check all packing material carefully for small parts that may come loose inside the carton during shipment.

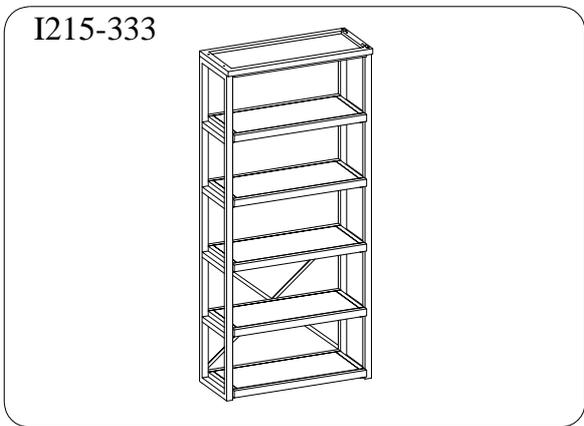


TOOLS REQUIRED (NOT PROVIDED)
PHILLIPS SCREWDRIVER 


HARDWARE LIST:			
No.	Description	Sketch	Quantity
A	Bolt Ø1/4" x 2-3/16"		4 PCS
B	Bolt Ø1/4" x 1"		24 PCS
C	Lock Washer Ø1/4"		28 PCS
D	Flat Washer Ø1/4" x 3/4"		28 PCS
E	Allen Wrench 4mm		1 PC
F	Wood Screw M4 x 1-3/16"		1 PC

COMPONENTS LIST:			
No.	Description	Sketch	Quantity
1	Side Assembly		2 PCS
2	Top Assembly		1 PC
3	Shelf		5 PCS
4	Metal Stretcher		2 PCS

FUNCTIONALITY INSTRUCTION



Take off one screw from each mounting plate and swing it to the proper location on the other bookcase before re-securing it with the screw.

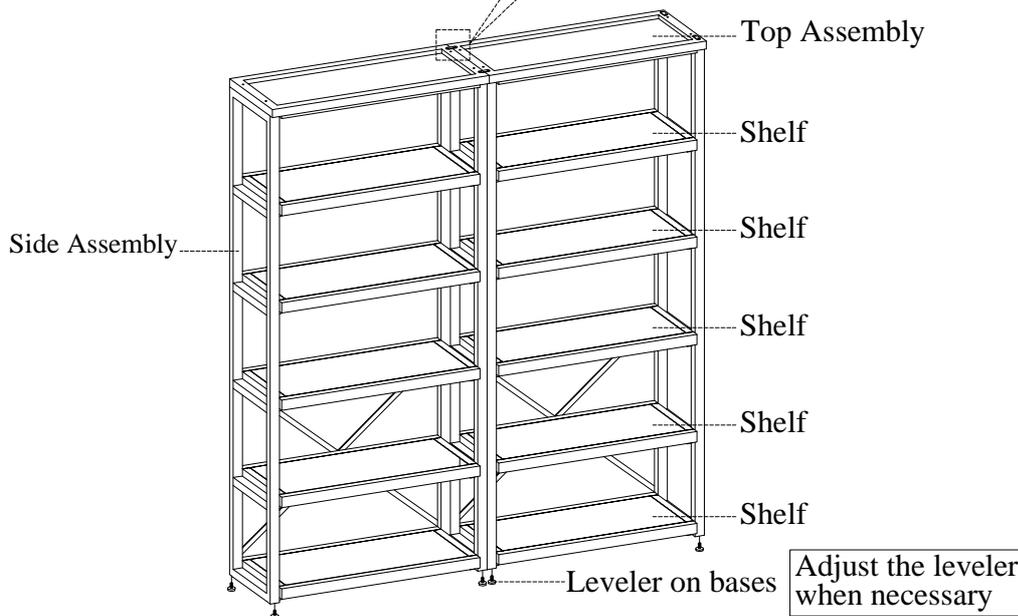

BEFORE USING THIS PRODUCT PLEASE READ, UNDERSTAND, AND FOLLOW THESE INSTRUCTIONS. Save these instructions for future reference.


FOR INDOOR USE ONLY




ITEM NO: I215-333 Open Display case

STEP 1: Put the side assemblies backside down on a soft surface.

STEP 2: Attach the shelves to side assemblies by using 20 bolts(B), lock washers(C) and flat washers(D). Do not completely tighten bolts.

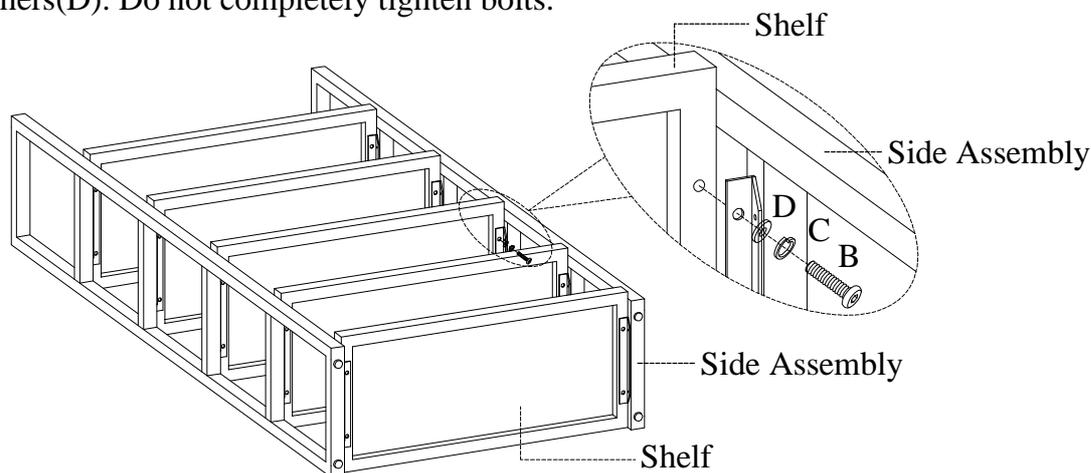

STEP 3: Attach the top assembly to side assemblies by using 4 bolts(A), lock washers(C) and flat washers(D). Completely tighten all bolts. Turn the assembled case to the upright position.

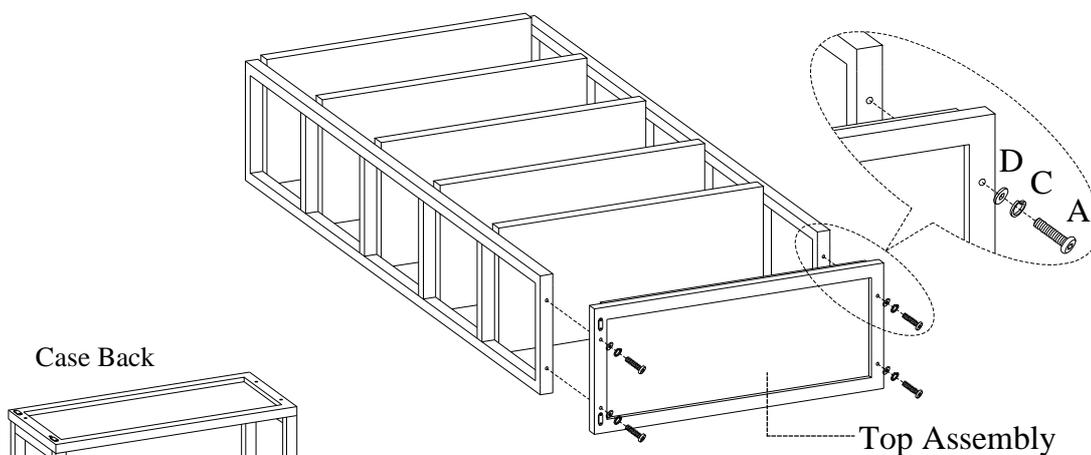

STEP 4: Place the metal stretchers on the back of the case assemble by using 4 bolts(B) and 1 wood screw(F), lock washers(C) and flat washers(D). Use the Allen wrench provided to tighten all the bolts.

